



Solutions for mitigation of condensation



NEW



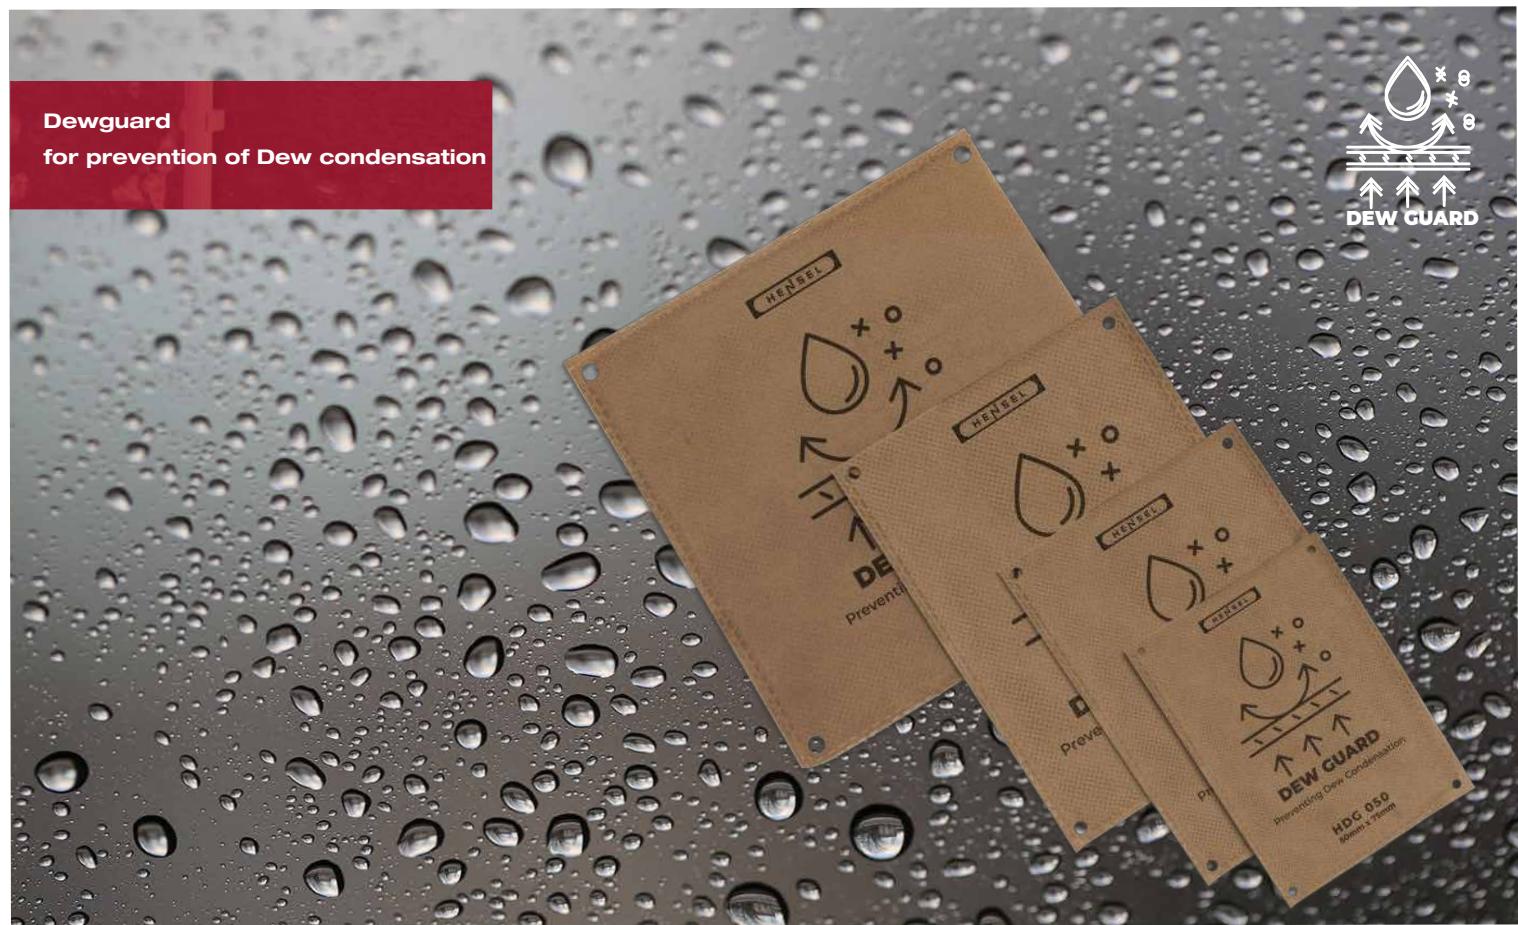



- Dew Guard is a thin sheet made from synthetic rubber and a super absorbent polymer and covered by a non woven fabric.
- Dew Guard absorbs moisture during high humidity and releases moisture during low humidity.
- This reversibility ensures that a constant level of humidity is maintained in the enclosed space.
- Due to this, the product continues to be in function over a large period of time and protects against condensation.

Product Features

- Absorbs moisture without any saturation, even in high humidity,
- Absorbency of 0.8g (H₂O) / 1g (product) @25 deg C and 95% RH or higher.
- Can be used for a long period of time thanks to its humidity absorption / release function.
- Works between a large temperature range of -30 deg C to +90 deg C.
- Halogen and silicon free
- Environment friendly and can be disposed of in regular trash.

Caution

- To be used in enclosed / airtight spaces only
- Not to be soaked in water

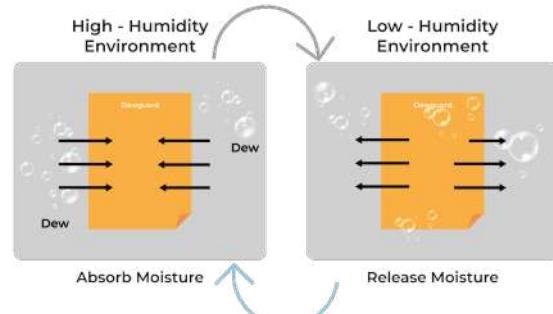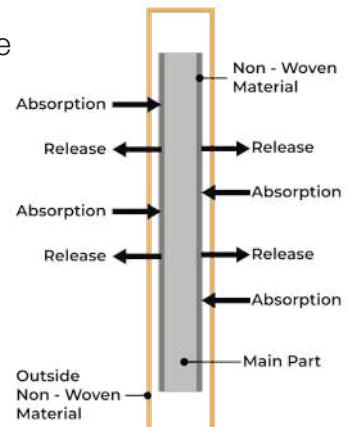




HDG 050

Dew guard


50mm x 75mm x 2mm
For use with
DK / kF / KV / FP / Mi range



HDG 075

Dew guard


75mm x 100mm x 2mm
For use with
DK / kF / KV / FP / Mi range



HDG 100

Dew guard


100mm x 150mm x 2mm
For use with
FP 02XX / 03XX / 04XX
Mi 04XX / 06XX / 08XX




HDG 150

Dew guard

150mm x 150mm x 2mm
For use with
FP 03XX / 04XX
Mi 04XX / 06XX / 08XX

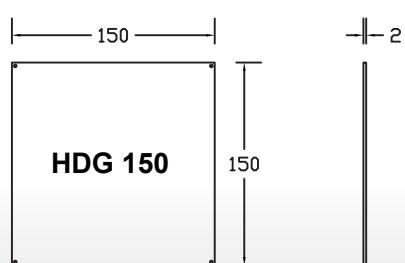

Fixation by means of a hook or
Velcro in the inner wall of a sealed enclosure

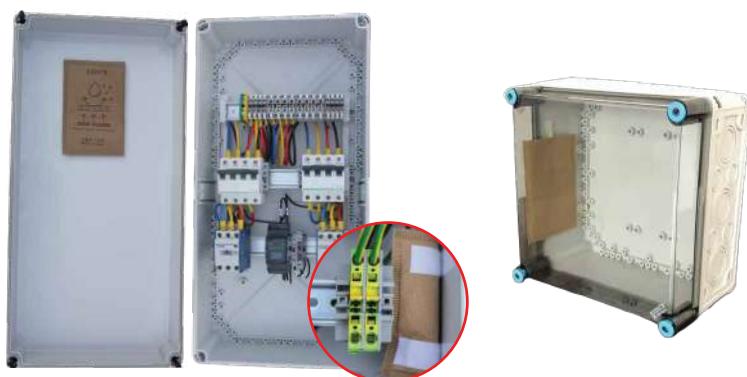

Application :
In enclosed spaces where
a risk of condensation exists



Hensel Electric India Pvt Ltd
Industrial Electrical Power Distribution Systems

35 Kunnam Village, Sunguvarchathram
Walajabad Road
Sriperumbudur - 631 604
Kanchipuram Dist., Tamil Nadu
INDIA

Phone: +91-44-6712 7700
Fax: +91-44-6712 7724
E-Mail: info@hensel-electric.in
www.hensel.in
Follow Us On: 