




Mi 0800

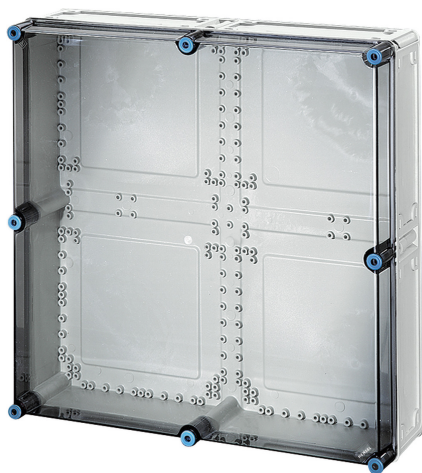

- Dimensions H x W x D: 600 x 600 x 170 mm

ELECTRICAL PROPERTIES

Rated insulation voltage:

Rated insulation voltage	Voltage type
U _i = 690 V	a.c.
U _i = 1000 V	d.c.

Protection class: II

CONNECTION DATA

MECHANICAL PROPERTIES

Protection cover according to DIN EN 61439 via lid	
Type of lid fastening:	Tool operation
Can be combined:	Yes
IP degree of protection:	IP65
Impact strength:	IK08

AMBIENT CONDITIONS

Application area:

Indoor installation

Maximum ambient temperature 24 h:

35 °C

Ambient temperature:

-25 °C up to +70 °C

MATERIAL PROPERTIES

Material:

Polycarbonate

Glow wire test according to IEC 60695-2-11:

960 °C

UV-beständig nach DIN EN 61439-1:

Yes

Halogen-free:

Yes

Silicone-free:

Yes

DIMENSIONS

Height:

600 mm

Width:

600 mm

Depth:

170 mm

Net weight:

6.264 kg

Mounting height:

575 mm

Mounting width:

575 mm

Mounting depth:

Equipping	Depth
Mounting plate	146 mm
DIN rail	135 mm

COLOURS

Colour of the lid:

Transparent

Bottom part colour:

Grey

CERTIFICATES

conforming to the standards:

IEC 61439-2

SALES DATA

Product number: 2000006
EAN: 4012591650065
Pack unit: 1
Customs tariff number: 85371098
ETIM class: DYNAMIC: EC000058 - Empty cabinet
ETIM-9.0: EC000058 - Empty cabinet
ETIM-8.0: EC000058 - Empty cabinet
ETIM-7.0: EC000058 - Empty cabinet
ETIM-6.0: EC000058 - Empty cabinet
ETIM-5.0: EC000058 - Empty cabinet
ETIM-4.0: EC000058 - Empty cabinet

NOTE

Note on the product:

- Cable entry only possible via flanges

TENDER TEXT

Insulation-enclosed power distribution board as power switchgear and controlgear assembly (PSC) in accordance with IEC 61439-2 for wall mounting. The enclosures must be suitable for outdoor installation - harsh environment and/or outdoor installation - the climatic effects on the equipment must be considered. Bottom parts and lids of the boxes made from impact-resistant polycarbonate, halogen and silicone-free, colour RAL 7035, transparent lid with quick action fasteners for tool operation. Burning behaviour according to IEC 60695-2-11 glow wire test + 960°C. Maximum water absorption 10 mg in accordance with DIN 53473. Protective measure: totally insulated (protection class II), Make: HENSEL Mi Power distribution board.

Rated loading factors

Power dissipation capability:

power dissipation capability Pde	Temperature difference
3.3 W	1 K

DRAWINGS

